


rotary vezin sampler

Model 4620

Follows the Latest Standards using Radial Cutter Design to Guarantee Accurate, Unbiased Sampling of Slurry

Continuous or optional intermittent sampling from an easy to install self-contained module

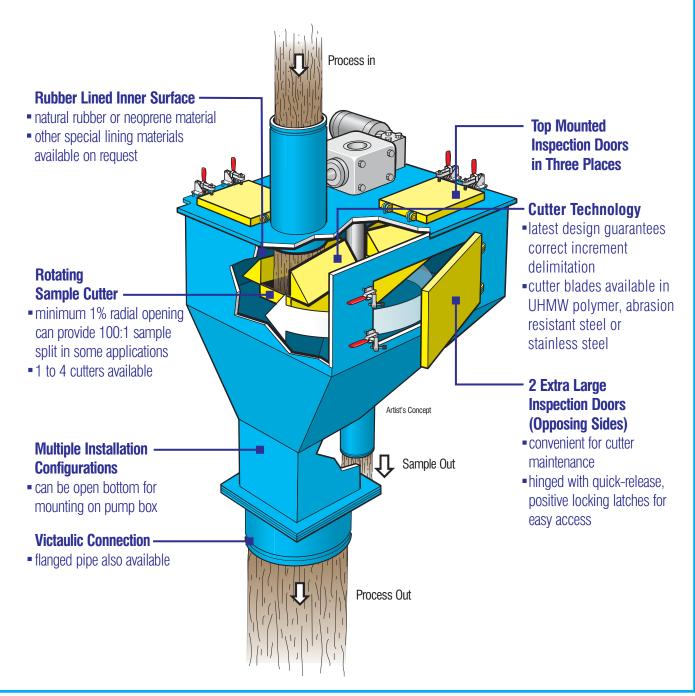


rotary vezin sampler



Model 4620

major components (standard design- two cutter slurry version)

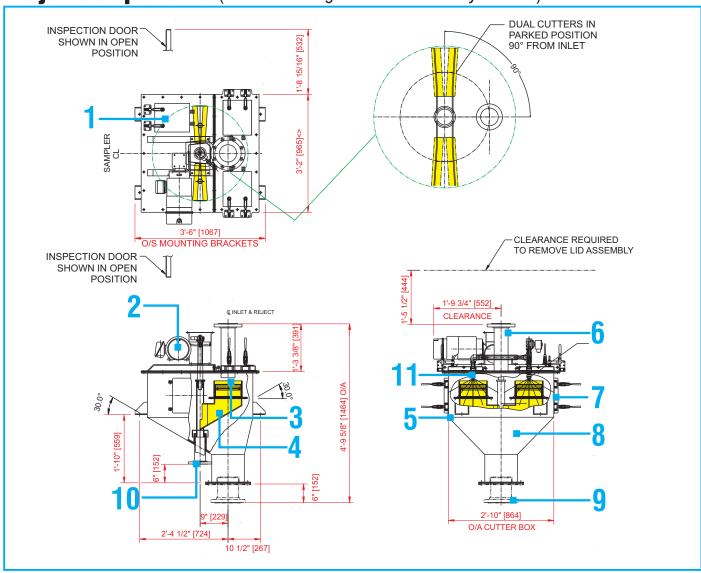

- 1 top mounted access doors (3)
- 2 standard motor for continuous operation: 1/4 hp T.E.F.C. at customer required voltage
 - standard motor for intermittent operation or for waterflush option:1/3 hp T.E.N.V. brakemotor at customer required voltage
- 3 cutter cap available in UHMW polymer, stainless, or abrasion resistant steel
- 4 cutter(s) available in arrangements of 1 to 4 sets

- body constructed of heavy steel plate (stainless steel available on request)
- 6 4 or 6 inch inlet 150# R/F flange connection shown (victaulic connection also available)
- 7 side mounted access doors (2)
- 8 transition bottom as shown (also available as open bottom)
- 9 6 or 8 inch discharge, 150# R/F flange connection shown (victaulic connection also available)
- 3 inch sample discharge pipe 150# R/F flange connection shown (victaulic connection also available)
- 11 optional water flush system for cutter cleaning
 - weight: 700 lbs (318 kg)
 - intermittent operation also available
 - CE marking available

Heath & Sherwood (1964) Limited Box 340 Kirkland Lake, Ontario Canada P2N 3J2 Tel: (705) 567-5313
Fax: (705) 567-8545
Toll Free in North America:
1 888-go sample (467-2675)
email: info@heathandsherwood.com

Subsidiary Offices:

Mississauga, Ontario Canada Agents World Wide

Visit our website:

www.heathandsherwood.com